



 PIPELIGHTING





 PIPELIGHTING

Ultimate  
power-to-weight ratio

 PIPELIGHTING

Soft light  
without any  
additional  
diffusers





 PIPELIGHTING

Waterproof  
and operative at any  
weather conditions



 PIPELIGHTING


Each unit is compact  
and supplied with  
its own travel bag





 PIPELIGHTING

Control the units  
via CRMX/wireless DMX





# Professional CRI-Index



**PIPE 2**

Power per color: **100 W**  
 Max power: **200 W**  
 Input voltage: **24 V**  
 Dimming range: **0% – 100%**  
 Colour range:  
**(2600 K – 5700 K)**  
 Mid range: **0% – 200%**  
 Lumens: **5 000**  
 IP rating: **IP67**

Lamphead weight: **0,7 kg**  
 Kit weight incl.  
 transportation bag: **5 kg**

inflated	Lux @	Lux @	Lux @	Lux @
deflated	1 m	2 m	4 m	6 m
2600 K 100%	614	322	107	49
	1178	525	185	90
5700 K 100%	729	326	115	57
	1365	547	200	99
4250 K 100%	1280	649	213	107
	2368	1070	355	186





**PIPE 4**


Power per color: **200 W**  
 Max power: **400 W**  
 Input voltage: **24 V**  
 Dimming range: **0% – 100%**  
 Colour range:  
**(2600 K – 5700 K)**  
 Mid range: **0% – 200%**  
 Lumens: **10 980**  
 IP rating: **IP67**

Lamphead weight: **1 kg**  
 Kit weight incl.  
 transportation bag: **6 kg**


inflated	Lux @	Lux @	Lux @	Lux @
deflated	1 m	2 m	4 m	6 m
2600 K 100%	1020	511	169	81
	1970	841	291	145
5700 K 100%	1209	543	185	91
	2132	878	326	165
4250 K 100%	2124	984	345	170
	3819	1699	563	294



35 cm



135 cm



20 cm

**PIPE 8**


Power per color: **400 W**  
 Max power: **800 W**  
 Input voltage: **24 V**  
 Dimming range: **0% – 100%**  
 Colour range:  
**(2600 K – 5700 K)**  
 Mid range: **0% – 200%**  
 Lumens: **21 960**  
 IP rating: **IP67**

Lamphead weight: **1,7 kg**  
 Kit weight incl.  
 transportation bag: **9 kg**

inflated	Lux @	Lux @	Lux @	Lux @
deflated	1 m	2 m	4 m	6 m
2600 K 100%	1020	511	169	81
	1970	841	291	145
5700 K 100%	1209	543	185	91
	2132	878	326	165
4250 K 100%	2124	984	345	170
	3819	1699	563	294



36 cm



260 cm




20 cm

**PIPEWIDE 44**

Power per color: **400 W**  
 Max power: **800 W**  
 Input voltage: **24 V**  
 Dimming range: **0% – 100%**  
 Colour range:  
**(2600 K – 5700 K)**  
 Mid range: **0% – 200%**  
 Lumens: **21 960**  
 IP rating: **IP67**

Lamphead weight: **2,4 kg**  
 Kit weight incl.  
 transportation bag: **11 kg**

inflated	Lux @	Lux @	Lux @	Lux @
deflated	1 m	2 m	4 m	6 m
2600 K 100%	1700	799	273	134
	3230	1310	462	233
5700 K 100%	1950	903	308	151
	3550	1430	523	250
4250 K 100%	3460	1600	557	269
	6390	2600	935	460

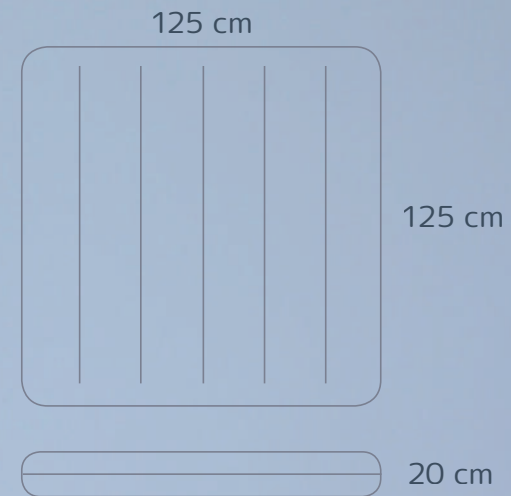

**PIPEWIDE 63**

Power per color: **400 W**  
 Max power: **800 W**  
 Input voltage: **24 V**  
 Dimming range: **0% – 100%**  
 Colour range:  
**(2600 K – 5700 K)**  
 Mid range: **0% – 200%**  
 Lumens: **21 960**  
 IP rating: **IP67**

Lamphead weight: **2,5 kg**  
 Kit weight incl.  
 transportation bag: **11 kg**


inflated	Lux @	Lux @	Lux @	Lux @
deflated	1 m	2 m	4 m	6 m
2600 K 100%	1700	799	273	134
	3230	1310	462	233
5700 K 100%	1950	903	308	151
	3550	1430	523	250
4250 K 100%	3460	1600	557	269
	6390	2600	935	460



90 cm



180 cm



20 cm

**PIPEWIDE 84**

Power per color: **800 W**  
 Max power: **1600 W**  
 Input voltage: **24 V**  
 Dimming range: **0% – 100%**  
 Colour range:  
**(2600 K – 5700 K)**  
 Mid range: **0% – 200%**  
 Lumens: **43 920**  
 IP rating: **IP67**

Lamphead weight: **3,6 kg**  
 Kit weight incl.  
 transportation bag: **14 kg**

inflated	Lux @	Lux @	Lux @	Lux @
deflated	1 m	2 m	4 m	6 m
2600 K 100%	2890	1358	464	228
	5491	2227	785	396
5700 K 100%	3315	1535	524	257
	6035	2431	889	425
4250 K 100%	5882	2720	947	457
	10863	4420	1590	782




**PIPETISSON**



Power per color: **150 W**  
 Max power: **300 W**  
 Input voltage: **24 V**  
 Dimming range: **0% – 100%**  
 Single color range:  
**(2600 K or 5700 K)**  
 Mid range: **0% – 200%**  
 Lumens: **8 240**  
 IP rating: **IP67**

Fixture weight: **1,5 kg**  
 Complete set weight  
 including travel bag: **6 kg**



inflated	Lux @	Lux @	Lux @	Lux @
deflated	1 m	2 m	4 m	6 m
2600 K 100%	816	409	135	65
	1576	673	233	116
5700 K 100%	967	434	148	73
	1706	702	261	132
4250 K 100%	1699	787	276	136
	3055	1359	450	235

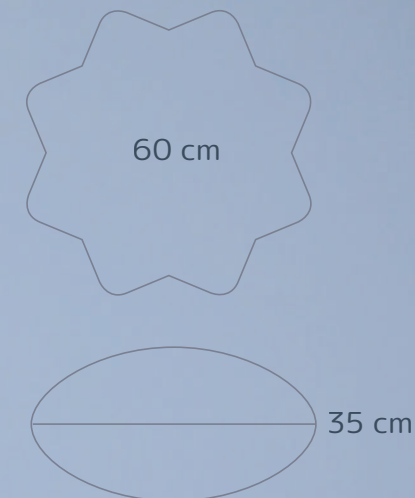

CRI 98 @ 2600 K

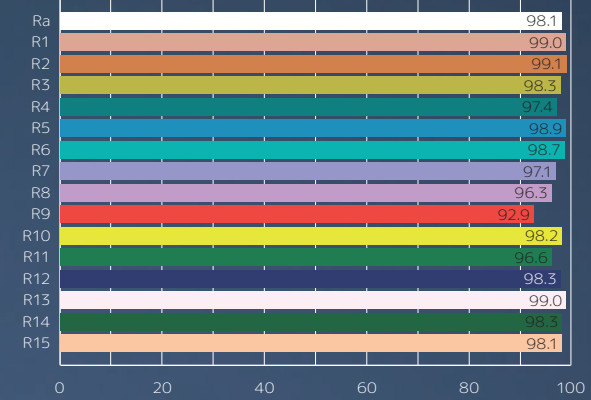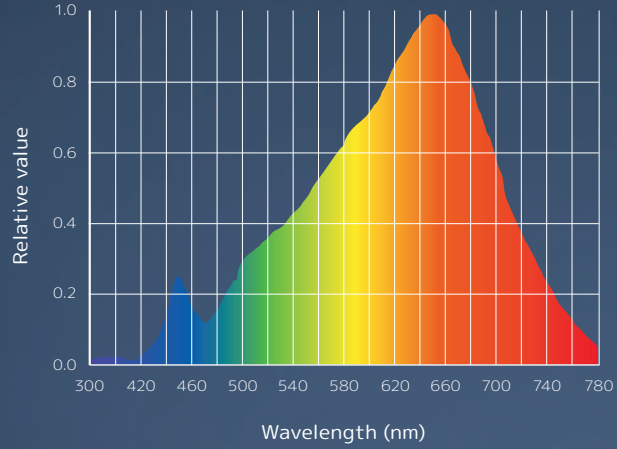

CRI 95 @ 5700 K

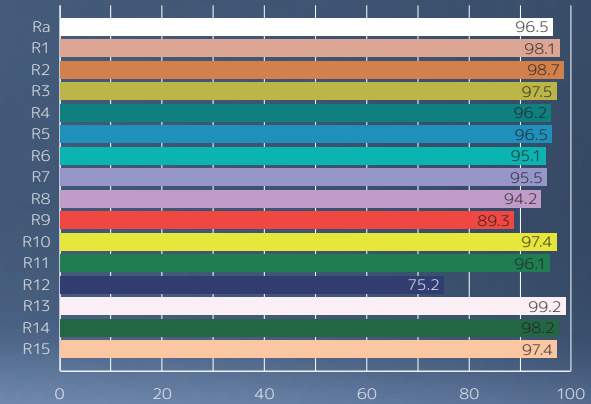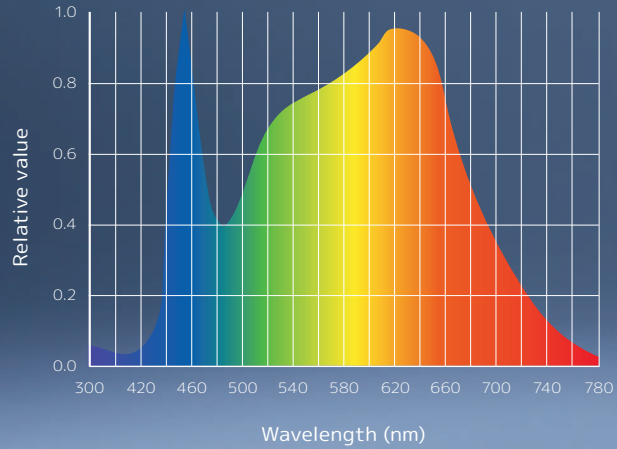


Model	PIPE 2	PIPE 4	PIPE 8	PIPEWIDE 44	PIPEWIDE 63	PIPEWIDE 84	PIPETISSON
Size (L × W × H), cm	65 × 35 × 20	135 × 35 × 20	260 × 36 × 20	125 × 125 × 20	180 × 90 × 20	240 × 120 × 20	35 × 60 ∅
Weight, kg	0,7	1	1,7	2,4	2,5	3,6	1,5
Voltage, V	24	24	24	24	24	24	24
Current per color, A	4	8	16	16	16	16+16	6
Total power rating, W	200	400	800	800	800	1 600	300
CRI	95 +						
CCT	2600–5700 K						
Lumens	5 490	10 980	21 960	21 960	21 960	43 920	8 240
IP rating	IP 67						



# Every set consists of

- Lamp head
  - Color temperature and brightness controller
  - Mount system (baby pin plate)
  - Power cable
  - Lamp head cable extension
  - Full side-skirt
  - Air pump
  - Transportation bag
- \* Soft grid supplied separately

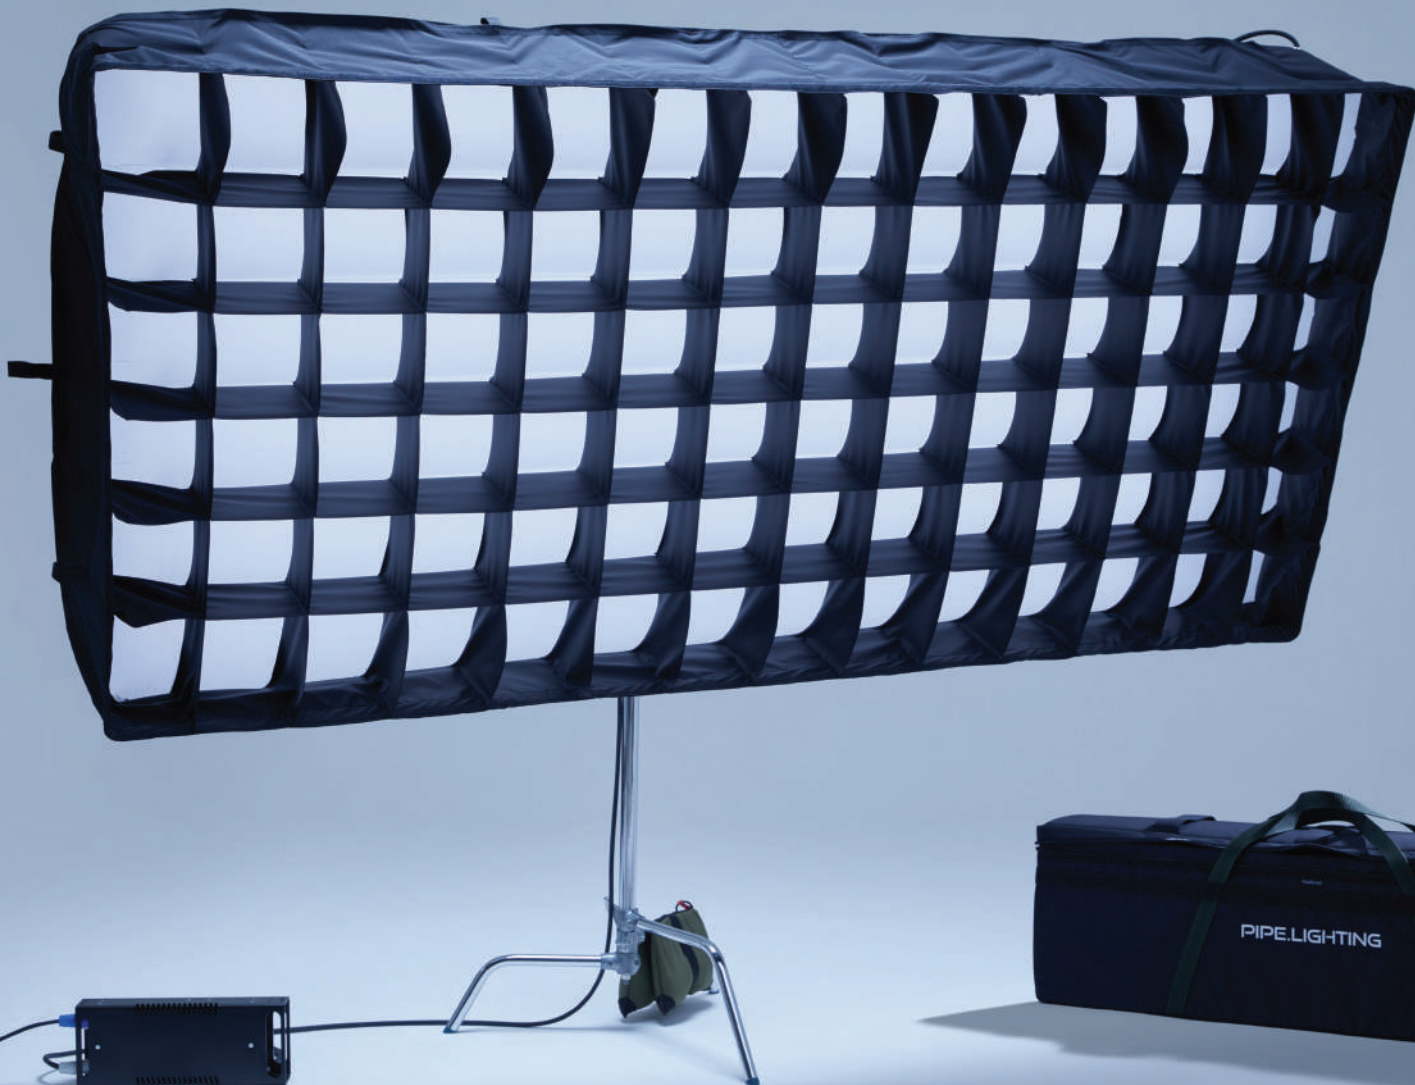

# About Us

Pipe Lighting started in Russia in 2018. By the time being we were producing helium balloon lights for the film industry, when the demand on the inflatable powerful LED lighting came to the market. Pipe Lighting was presented at feature movie Russian film sets and commercial shootings and it was on time to make it global. We introduce our air-filled LED lighting systems to the world.

The advantages of our lighting fixtures are:

- Ultimate power-to-weight ratio
- Soft light without any additional diffusers
- Waterproof and operative at any weather conditions
- Each unit is compact and supplied with its own travel bag
- CRMX/wireless DMX control
- Professional CRI-Index
- Noiseless passive cooling
- Flicker-Free




# Contacts

Eduard Bochanov

OUR SHOWROOM IS LOCATED AT:

⋮ Pipe Lighting UG  
Winterhuder Weg 42  
22085 Hamburg, Germany

 +49 40 72377273  
+49 151 29931049

 eu@pipe.lighting

 @pipe.lighting

